
SPARTA-CHIP™

A multi-coat chip broadcast polyaspartic coating system designed to provide a capable, terrazzo-like seamless flooring finish. Available in standard as well as mica-chip blends.




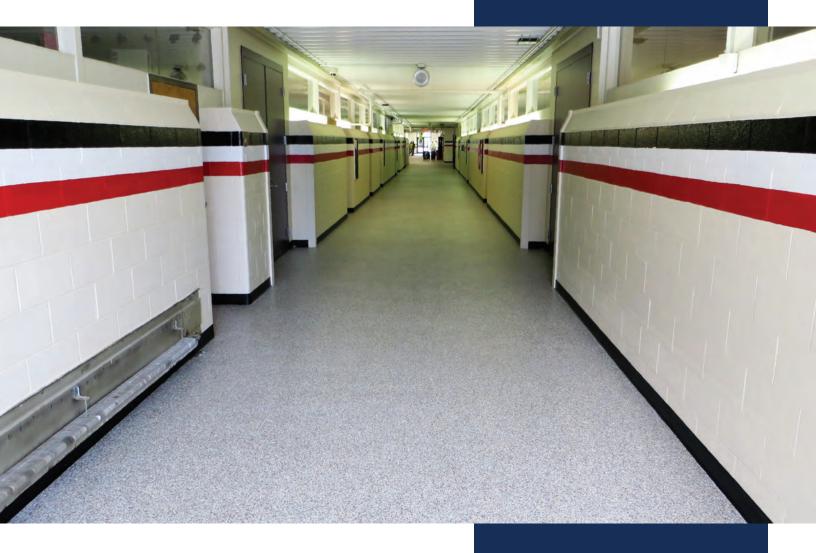

Sparta-Chip™

Decorative Clear Top Coat(s) Broadcast Coat Prepared Substrate Base Coat

Mica-Chip™



- Residential Garages
- Recreational Facilities
- Locker Rooms
- Animal Facilities
- Shop Floors
- Retail Showrooms
- Grocery Stores
- Schools

© 2013, HP Spartacote®, Inc.



SYSTEM FEATURES & BENEFITS:

- 1-day installation with next-day return to service
- Wide assortment of blends and finishes

Beechnut Mica

- May be used as a floor & wall coating (vertical surface)
- Minimal maintenance
- Cold-weather application
- No hot-tire pickup
- Superior chemical resistance including gasoline, oil and de-icing salts

System Variations	OVERALL THICKNESS	APPLICATIONS
SPARTA-CHIP™	20 mils DFT	Residential garage floor coatings as well as heavy foot-traffic applications.
SPARTA-CHIP SL™	1/16"-1/4" (67.5-250 mils DFT)	Used where added thickness is required, including older degraded concrete substrates.
SPARTA-CHIP PURE™	20 mils DFT	Minimal Odor, VOC-Free. Ideal for interior applications.
Sparta-Chip™ SL	1/16"-1/4" (67.5-250 mils DFT)	Minimal Odor, VOC-Free. Ideal for interior applications where self-leveling and thickness is required.





CURED SYSTEM PROPERTIES	SPARTA-CHIP™
Coefficient of Friction	dry: 0.95
(ASTM C-1028)	wet: 0.65
Hardness (ASTM D 2240):	80
Abrasion Resistance (ASTM D-4060 mg loss):	22-28
Tensile Strength (ASTM D-638,D-2370 psi)	4500-5000
Substrate Adhesion (ASTM D-4541, psi)	400-500+, concrete fracture
Flammability: (ASTM D-635)	self extinguishing